

4WD FOLDING WHEEL STEP



INSTRUCTION MANUAL

V1

AFTER SALES SUPPORT

713254



AUS

1300 883 104



www.4x4tough.com.au

sales@4x4tough.com.au

MODEL:

23-231803

SAP ID:505144

09/23

Contents

	Page
WELCOME	3
INTENDED USE	4
CONTENTS	4
SPECIFICATIONS	4
INSTRUCTIONS FOR USE	5-6
CARE AND MAINTENANCE	7
DISPOSAL	7

WELCOME

Congratulations on choosing to buy a 4X4 TOUGH® product.

In the event you require assistance with your purchase please contact one of our experienced customer service team on 1300 883 104.

Satisfied customers have repeatedly attested to the positive outcome of a simple phone call in resolving misunderstandings and gaining positive insights into product usage.

This product is manufactured to the highest standards of safety and performance.

Please read instructions carefully before use.

Unless directions are followed physical injury or property damage may result.

Save these instructions for future reference.

INTENDED USE

Accessing the roof racks or tray top on your four wheel drive is made simple with this handy 4x4 wheel step. Designed to fit most 4WD & SUV tyre sizes, the step also folds flat for easy storage while travelling..



CONTENTS

- 1 x 4WD Tyre step
- 1 x Instruction Manual

SPECIFICATIONS


Composition	Steel
Dimensions folded	555×390×110 mm
Dimensions opened	555×640×355 mm
Standing platform	545×187mm
Rated load capacity	150kg
Suitability:	Minimum tyre size 195/65/R15 Maximum tyre size 275/50/R20

INSTRUCTIONS FOR USE

How to adjust your wheel step to suit your tyre.

UNFOLD THE WHEEL STEP.

1. Check the width of the tyre, then adjust the tyre steps width to the most suitable and secure position. Suitable for tyres with a width of 195 – 275mm. The product has 5 width adjustments.

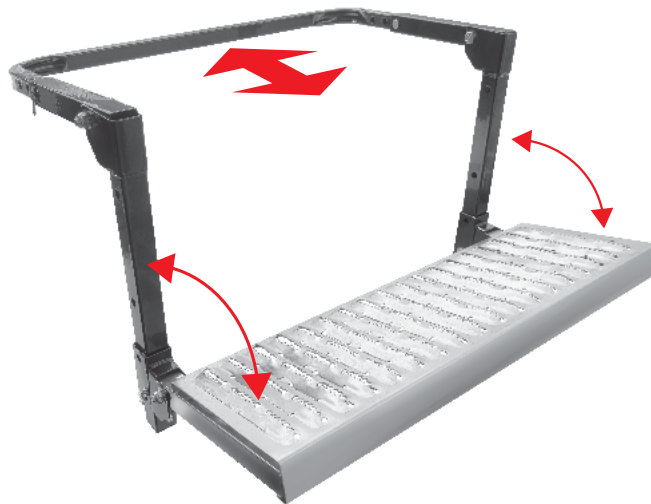

1A. Insert the supplied bolt into position and secure with the R-Clip on both sides of the wheel step to secure the position.


2. Hook the step over your wheel and ensure it is secure



3. Adjust the height setting to the height of choice. This can be done with ease while the tyre step is mounted on the tyre. The product has 4 height adjustments.



3A. Insert the supplied bolt into position and secure with the R-Clip on both sides of the wheel step.

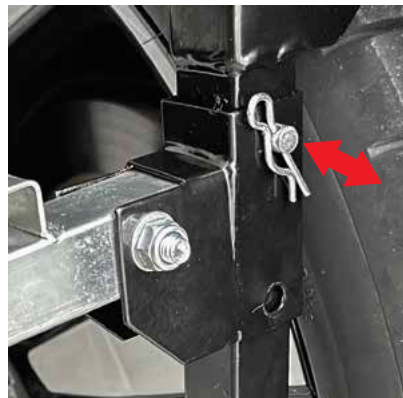

4. Use the adjustable rubber bumpers to protect your wheels and ensure the step is sturdy and level.



NOTE In order to prevent the screws from loosening when in use, the screws must be screwed inside as far as possible, preferably parallel to the other hole of the square tube.

The Wheel step is now ready to use.

DO NOT FORGET TO REMOVE THE QUICK STEP FROM THE VEHICLE'S WHEEL IMMEDIATELY AFTER USE

WARNINGS AND SAFEGUARDS

- **The Product is designed to be used by 1 person only standing on the platform.**
- Never exceed the Rated load capacity of 150kgs.
- Do not jump on the platform when the step is in use.
- Cracked steps and uprights or loose or missing parts can result in total collapse of the Tyre Step.
- DO NOT attempt to reposition the Tyre Step while standing on it.
- When ascending or descending, always face the Tyre Step.
- DO NOT over reach. If you need to stretch or go up on your tip-toes while on the Tyre Step, either reposition the Adjustable Tyre Step or use a ladder.
- Make sure the vehicle transmission is in park or neutral and the emergency brake is on before using the Tyre Step.

CARE AND MAINTENANCE

Wipe over with a mild detergent and damp cloth.

DISPOSAL

Consult your local council waste authority for information regarding disposal options.

4X4[®]
TOUGH

GO OFF ROAD