

# 4WD FOLDING WHEEL STEP



## INSTRUCTION MANUAL

V1

AFTER SALES SUPPORT

716619



AUS

1300 883 104



[www.4x4tough.com.au](http://www.4x4tough.com.au)

[sales@4x4tough.com.au](mailto:sales@4x4tough.com.au)

MODEL:

24-231803

SAP ID:571521

08/24

# Contents

	<b>Page</b>
WELCOME .....	3
INTENDED USE .....	4
CONTENTS .....	4
SPECIFICATIONS .....	4
INSTRUCTIONS FOR USE .....	5-6
CARE AND MAINTENANCE .....	7
DISPOSAL .....	7

# WELCOME

**Congratulations on choosing to buy a 4X4 TOUGH® product.**

**In the event you require assistance with your purchase please contact one of our experienced customer service team on 1300 883 104.**

*Satisfied customers have repeatedly attested to the positive outcome of a simple phone call in resolving misunderstandings and gaining positive insights into product usage.*

This product is manufactured to the highest standards of safety and performance.

Please read instructions carefully before use.

Unless directions are followed physical injury or property damage may result.

Save these instructions for future reference.

## INTENDED USE

Accessing the roof racks or tray top on your four wheel drive is made simple with this handy 4x4 wheel step. Designed to fit most 4WD & SUV tyre sizes, the step also folds flat for easy storage while travelling.



## CONTENTS

- 1 x 4WD Tyre step
- 1 x Instruction Manual

## SPECIFICATIONS


<b>Composition</b>	<b>Steel</b>
<b>Dimensions folded</b>	<b>555×390×110 mm</b>
<b>Dimensions opened</b>	<b>565×610×360 mm</b>
<b>Standing platform</b>	<b>535×187mm</b>
<b>Rated load capacity</b>	<b>150kg</b>
<b>Suitability:</b>	<b>Minimum tyre size 195/65/R15</b>
	<b>Maximum tyre size 275/50/R20</b>

# INSTRUCTIONS FOR USE

## How to adjust your wheel step to suit your tyre.

### UNFOLD THE WHEEL STEP.

1. Check the width of the tyre, then adjust the tyre steps width to the most suitable and secure position. Suitable for tyres with a width of 195 – 275mm. The product has 5 width adjustments.

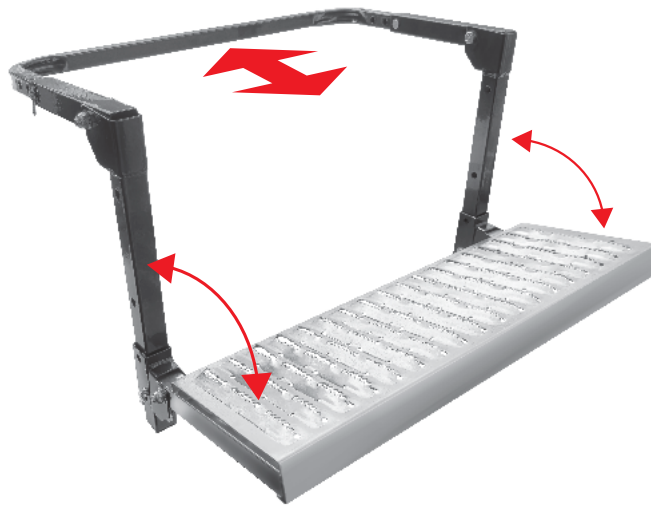

**1A.** Insert the supplied bolt into position and secure with the R-Clip on both sides of the wheel step to secure the position.


**2.** Hook the step over your wheel and ensure it is secure



**3.** Adjust the height setting to the height of choice. This can be done with ease while the tyre step is mounted on the tyre. The product has 4 height adjustments.



**3A.** Insert the supplied bolt into position and secure with the R-Clip on both sides of the wheel step.

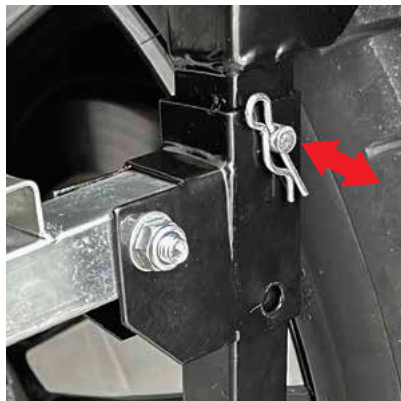

**4.** Use the adjustable plastic bumpers to protect your wheels and ensure the step is sturdy and level.



**NOTE** In order to prevent the screws from loosening when in use, the screws must be screwed inside as far as possible, preferably parallel to the other hole of the square tube.

**The Wheel step is now ready to use.**

**DO NOT FORGET TO REMOVE THE WHEEL STEP FROM THE VEHICLE'S WHEEL IMMEDIATELY AFTER USE**

## **WARNINGS AND SAFEGUARDS**

- **The Product is designed to be used by 1 person only standing on the platform.**
- Never exceed the Rated load capacity of 150kgs.
- Do not jump on the platform when the step is in use.
- Cracked steps and uprights or loose or missing parts can result in total collapse of the Tyre Step.
- DO NOT attempt to reposition the Tyre Step while standing on it.
- When ascending or descending, always face the Tyre Step.
- DO NOT over reach. If you need to stretch or go up on your tip-toes while on the Tyre Step, either reposition the Adjustable Tyre Step or use a ladder.
- Make sure the vehicle transmission is in park or neutral and the emergency brake is on before using the Tyre Step.

## **CARE AND MAINTENANCE**

Wipe over with a mild detergent and damp cloth.

## **DISPOSAL**

Consult your local council waste authority for information regarding disposal options.

**4X4<sup>®</sup>**  
**TOUGH**  

---

**GO OFF ROAD**